


BACKHOE

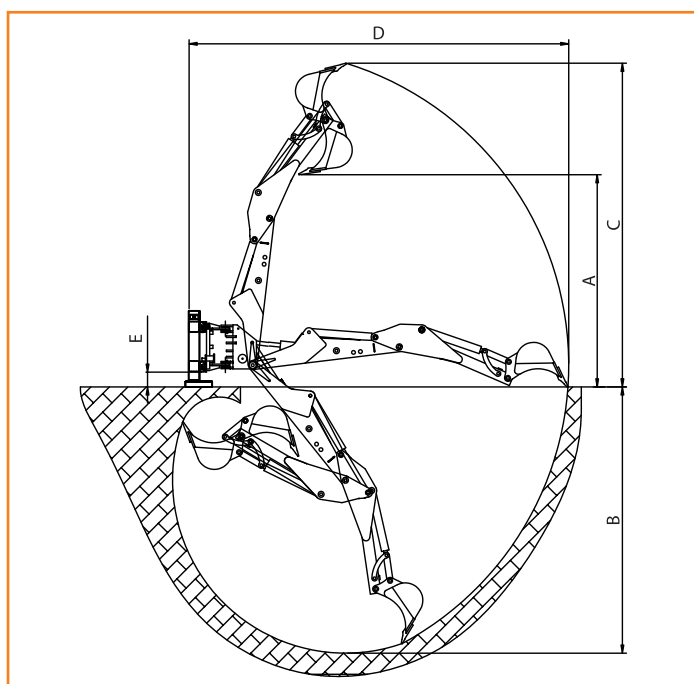

A (mm)	1950
B (mm)	2600
C (mm)	2965

D (mm)	3545
E (mm)	200

Bucket size available 300mm, 450mm, 600mm Ditch Cleaning

Bucket 600 mm

Side Shift feature is also available

Note : All dimensions are variable within $\pm 1.5\%$. VAEPL reserves the right to change specifications without prior notice

www.vectraadvanced.com

TECHNICAL SPECIFICATION

Hydraulic backhoe with transeatable frame and mechanical block, hydraulic and independent stabilize feet, main joints with pins and bushes in hardened and rectified steel, linkage kit for skid-steer loader and backhoe loader.

Digging depth (mm)	2600
Weight (Kg.)	600
Frame largeness (mm)	1400
Swing each side	90°
Oil flow (LPM)	80
Pressure (Bar)	175
Bucket Breakout Force (KN)	23



VECTRA ADVANCED ENGINEERING PVT. LTD.

Registered Office : Vectra House, No. 15, 1st Main Road, 6th Cross, Gandhinagar, Bangalore - 560 009, INDIA Ph: +91-80-41290011
Fax: +91-80-41516422 • E-mail : vectrablg@vectraindia.com

Factory : Plot No. 22, Udyog Vihar, Greater Noida, Gautam Budh Nagar, Uttar Pradesh - 201 306, INDIA Ph: +91-120-4746300,
Fax: +91-120-4746376 • E-mail : vectradel@vectraindia.com